

SMART storage for AdBlue®

ready to be connected to free standing dispenser



AdBlue® · Batteries · Green Solutions



Standard:



double skin tank (2 tanks)



movable roof for maintenance



sound & light overflow alarm



stainless steel construction & piping



prepared connection to separately standing dispenser



prepared electrical cables and piping for cards managing system



openings for forklift



submersible pump with dry run protection



2" dry break coupling for cistern filling



mechanical level indicator

Capacities: 3.000 ● 4.000 ● 6.000 l

Options:



your branding




small door for filling



dispenser connection kit



telemetry




heating/cooling system (depends on climate conditions)

all our products meet ISO 22241 standards about AdBlue®

CAPACITIES, DIMENSIONS & WEIGHT

FRONT PANEL

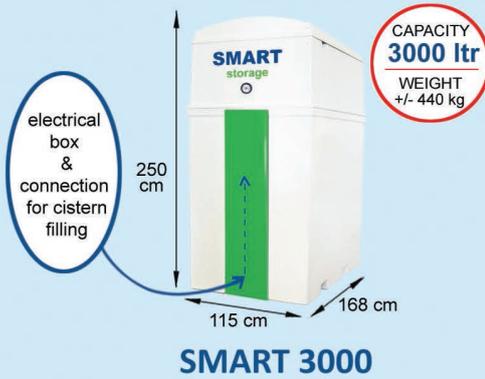

SIDE PANELS




TECHNICAL SPECIFICATION

Power Supply	1 x 230V / 50 Hz
Dry Break Coupling	DN d-50 mm
Heating	102 - 153 W
Overfill Protection	230 V / 50 Hz
Cable Connection	3 x 1,5 mm ²
Operating Conditions	- 20°C - + 45°C

CONNECTION POSSIBILITIES

All **storage** tanks can be connected with dispensers from: **Gilbarco, Tokheim, Dresser Wayne, Adast, Petrotec** or any other free standing dispenser (calibrated or not).

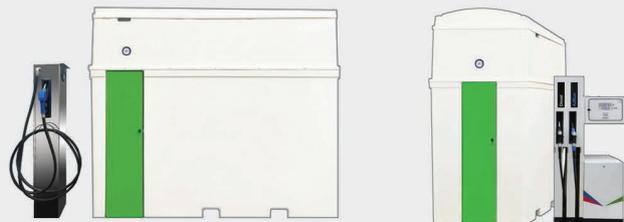

MATERIALS

External tank	fiberglass
Inner tank	polyethylene
Pipes	stainless steel

AdBlue®

get independent & reduce costs



AdBlue® · Batteries · Green Solutions
Storage Partners Group Sp. z o.o.
Gipsowa 11 Street, 62-080 Sierosław (Poznań), Poland
tel. +48 61 814 79 68 info@storage-partners.com
www.storage-partners.com