

SMART XL NEW for AdBlue®

from fiberglass



Standard



double skin tank




service door & movable roof for maintenance



stainless steel construction & piping



2" dry break coupling for cistern filling



openings for forklift



submersible pump with dry run protection



sound & light overflow alarm



mechanical level indicator

8.000

10.000

capacities



for trucks & passenger cars



SMART XL NEW storage

Service door on front or side (left or right)



ready to be connected to free standing dispenser with MID approval



SMART XL NEW premium

Dispensing line / service door on front or side (left or right)



with hose reel (up to 4,5 m)

SMART XL NEW comfort

Dispensing line / service door on front or side (left or right)



with loose hose /1 or 2/ (up to 5m)

SMART XL NEW storage

Service door on front or side (left or right)



ready to be connected to free standing dispenser



SMART XL NEW premium

Dispensing line / service door on front or side (left or right)



with hose reel (up to 4,5 m)

SMART XL NEW comfort

Dispensing line / service door on front or side (left or right)



with loose hose (up to 5m)

for private use

Options



your branding



1 or 2 loose hoses



ATEX and/or MID



hose reel with hose 4,5 m



winter package




satellite connection (3/4" pipe)

all our products meet ISO 22241 standards about AdBlue®


SMART XL NEW from fiberglass

external dimensions

SMART XL NEW 8.000
capacity 8000L

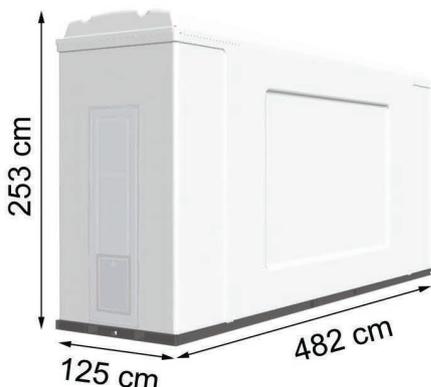


SMART XL NEW 10.000 LG
capacity 10.000L

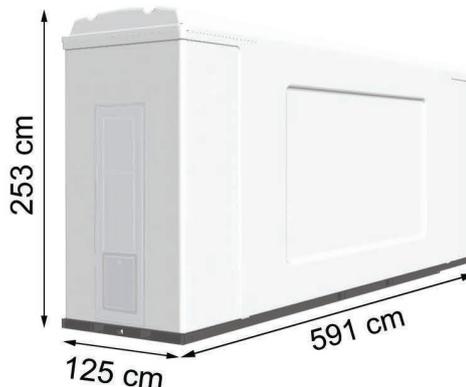


SMART XL
from XPS sandwich walls:


SMART XL 8.000 SQ




SMART XL 9.000



SMART XL 10.000



SMART XL 12.000



TECHNICAL SPECIFICATION

Power Supply	1 x 230V / 50 Hz
Pump Efficiency	max. 40 l/min
Pump Pressure	2,5 bar
Dry Break Coupling	DN d-50 mm ²
Cable Connection	3 x 1,5 - 2,5 mm
Operating Conditions	- 25° C - + 45° C

MATERIALS

External tank	fiberglass
Inner tank	polyethylene
Pipes	stainless steel
Hose	EPDM DN 19

SMART XL and XL NEW giant solution
is available in following nozzle configurations:

1-hose



TRUCK or PC
(loose hose or hose reel)
flowrate: 4-40 l/min or
flowrate: 2-10 l/min

2-hose



TRUCK & PC
(loose hose)
flowrate: 4-40 l/min & 2-10 l/min

2-hose



TRUCK & PC
(loose hose or hose reel)
flowrate: 4-40 l/min & 2-10 l/min

AdBlue®
get independent & reduce costs



STORAGE PARTNERS
AdBlue® · Batteries · Green Solutions
Storage Partners Group Sp. z o.o.
Gipsowa 11 Street, 62-080 Sierosław (Poznań), Poland
tel. +48 61 814 79 68 info@storage-partners.com
www.storage-partners.com